


MRx



**MESA DE FRIO**

COLD COUNTER / MESA DE FRIO / TOUR RÉFRIGÉRÉ

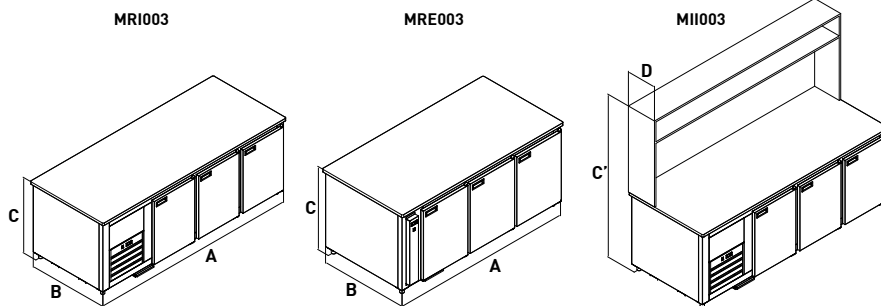

CC\_022-9

	MRI001	MRI002	MRI003	MRI004	MRE002	MRE003	MRE004	MRE005	
* TEMPERATURA (°C) * Temperature / Temperatura / Température	2				2				
DIMENSÃO DOS TABULEIROS (mm) Trays dimension / Dimensión de las bandejas / Dimension de plaques	750x450				750x450				
** CAPACIDADE TABULEIROS ** Trays capacity / * Capacidad de bandejas / * Capacité de plaques	8	16	24	32	16	21	29	37	
PORTAS (un) Doors / Puertas / Portes	1	2	3	4	2	3	4	4	
GÁS REFRIGERANTE Cooling gas / Gás refrigerante / Gaz réfrigérant	R454C (GWP 148)				R454C (GWP 148)				
POTÊNCIA (W) Power / Potencia / Puissance	230V. 1ph.50-60Hz	0,19	0,19	0,38	0,38	0,19	0,38	0,38	
*** POTÊNCIA FRIGORÍFICA (W) *** Cooling power / Potencia frigorífica / Puissance frigorifique		591	591	1010	1010	591	1010	1010	
ESPESSURA PAINEL (mm) Thickness insulation panel / Espesor aislamiento / Épaisseur panneaux mousse	50				50				
PESO LÍQUIDO (kg) Net weight / Peso neto / Poids net		150	177	206	233	150	177	206	233
	A	1500	2000	2500	3000	1500	2000	2500	3000
DIMENSÕES (mm) Dimensions / Dimensiones / Dimensions	B	1000	1000	1000	1000	1000	1000	1000	1000
	C	900	900	900	900	900	900	900	900
		MII001	MII002	MII003	MII004	MIE002	MIE003	MIE004	
un		10	14	18	20	10	14	18	
OPÇÃO: ESCAPARATE COM CUVETES (un) Option: ingredient containers / Opción: cajón de ingredientes / Option: bacs	C'	1850	1850	1850	1850	1850	1850	1850	
	D	350	350	350	350	350	350	350	

\* Temperatura ambiente inferior a 45°C / Room temperature under 45°C / Temperatura ambiente inferior a 45°C / Température ambiante inférieure a 45°C.

\*\* 80mm entre calhas / 80mm spacing between sliding guides / 80mm de espacio entre guías / 80mm d'espace entre glissières

\*\*\* Potência frigorífica de acordo com a norma EN 13215/CECOMAF / Cooling power according to EN 13215/CECOMAF / Potencia frigorífica de acuerdo con la normativa EN13215/CECOMAF / La puissance frigorifique est conforme à la norme EN 13215/CECOMAF.